




QA-X04-A01801-0XXX-0-02 QSFP+ AOC

Product Summary

The Quad Small Form-Factor Pluggable (QSFP+) AOC (Active Optical Cable) transceiver is a highly integrated 4-channel optical module that provides increased port density and total system cost savings. The QSFP+ full-duplex optical modules offer 4 independent transmit and 4 receive channels, each capable of 10.3125 Gbps operation for an aggregate bandwidth of 41.25 Gbps over 100 meters of optical fiber*.

The QSFP+ AOC transceiver modules have been designed to meet the harshest external operating conditions including temperature, humidity and EMI interference. The modules offer very high functionality and feature integration, accessible via a two-wire serial interface.

** Actual link distance depends on fiber type and data rate*

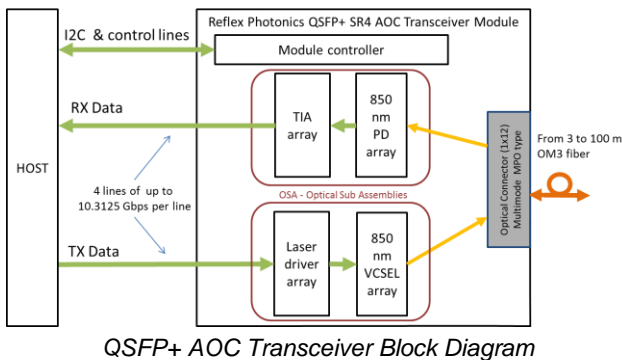


Specifications and Features Highlights

- Up to 10.3125 Gbps per channel bandwidth
- 4 Independent full-duplex channels
- Single +3.3V power supply
- CML compatible electrical I/O
- 3 to 100 meter transmission distance*
- Ruggedized 50/125um MM Fiber
- Minimum bend radius 25 mm
- Operating case temperature: 0 to 70°C
- Digital diagnostic capabilities
- Low power level (max 1.5 W per each terminal)
- QSFP+ MSA compliant
- RoHS compliant

() Part depended*

Applications


- High-performance computing clusters
- Data center backbone
- Ethernet switches
- High-speed servers
- SAN, Routers, hubs, load balancer

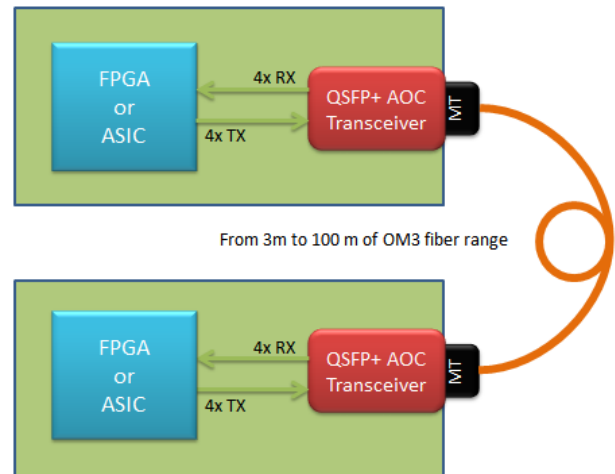

Optical Interface


The Active Optical Cable QSFP+ SR4 module removes the need for optical fiber connectors. The modules are available in standard distance range. These Active Optical Cables utilize multimode fiber using a nominal wavelength of 850nm.

Mechanical Considerations

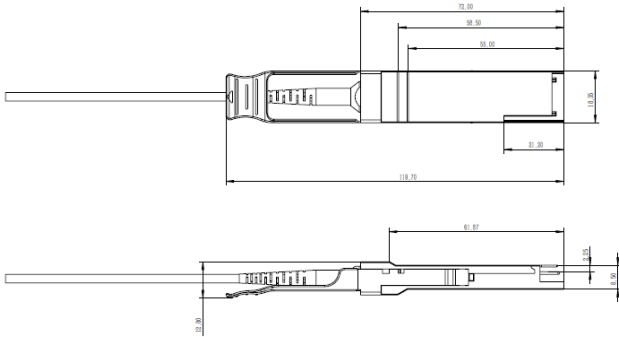

Compliance

Description	Specification
EMC	EN 55022: 2010 EN:55024:2010
RoHS	2002/95/EC
<i>General information only; details are in data spec</i>	

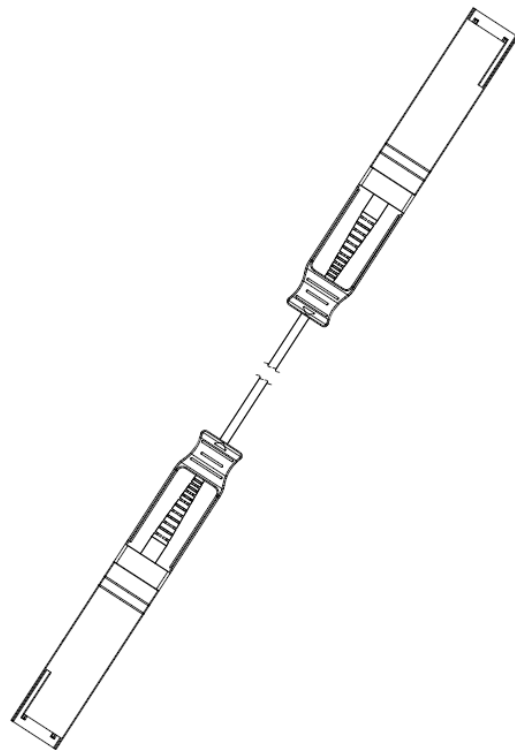

QSFP+ AOC

Ordering Information

Part Number Description
<p>PN: QA-X04-A01801-0XXX-0-02</p> <p>40G Ethernet, QSFP+ AOC Fiber Optic Transceiver Module (10.3 Gbps per channel/RX and TX).</p> <p>XXX represents fiber length. Available distances are: 3, 5, 7, 10, 15, 20, 25, 30, 40, 50 and 100 m.</p> <p><i>For custom lengths please contact sales department.</i></p>

For more information on this or other products:
 Contact sales at
1-514-842-5179 or 1-408-715-1781
 or by email at sales@reflexphotonics.com

© Copyright 2014; Reflex Photonics, Inc.

This document including pictures and drawings contains information about a new product during its early phase of development. The information contained herein is given to describe certain components and shall not be considered as a guarantee of characteristics. Reflex Photonics reserves the right to change the design or specifications of the product at any time without notice. The material is provided as is and without any warranties, including but not limited to warranties of non-infringement, description and fitness for a particular purpose.

Disclaimer: Information furnished by Reflex Photonics is believed to be accurate and reliable. However, no responsibility is assumed for its use. Reflex Photonics makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

Note: Document revision history is present in separate document.