


**Reflex Photonics PPOD  
Commercial 5Gbps  
Parallel Optical Transmitter/Receiver**

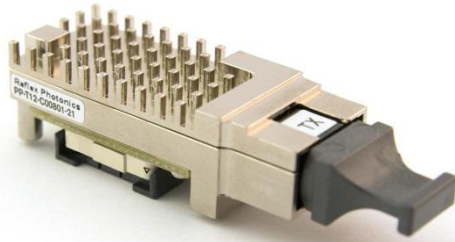

**Product Summary**

Reflex Photonics PPOD is a 12 channel pluggable parallel optical transmitter or receiver module. All modules include Reflex Photonics' state of the art **LightABLE™** optical packaging technology. The PPOD Transmitter and Receiver modules enable high performance multi-channel optical links designed for high-speed data communications and computing applications. The module operates at up to **5Gbps** per channel in commercial temperature ranges. The interconnect distance is up to 150m.

**Applications:**


- Board to board interconnect
- Rack to rack interconnect
- System to system interconnect
- Server farms and mass storage interconnects
- High performance computing
- OIF-VSR5-01 (Very Short Reach OC-768)

**Specification and Feature Highlights:**



- 12 independent parallel optical channels
- Data rate of up to 5 Gbps per channel
- Commercial operating range (0°C to +80°C)
- High reliability via advanced **LightABLE™** technology
- 125mw / channel typical power consumption
- Field replaceable
- Card edge mountable
- OM3 and OM4 multi-mode fibers supported
- Single 3.3V power supply
- Standard MPO/MTP™ interconnect
- 850-nm short-reach OIF-VSR compatible
- Data Protocol Agnostic with Balanced Code



Complete end-to-end 12 channel parallel optical link

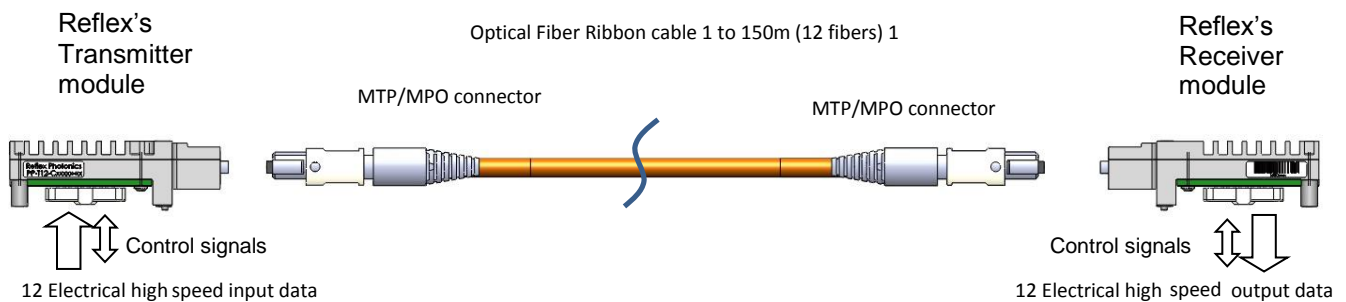


## Functional Diagram

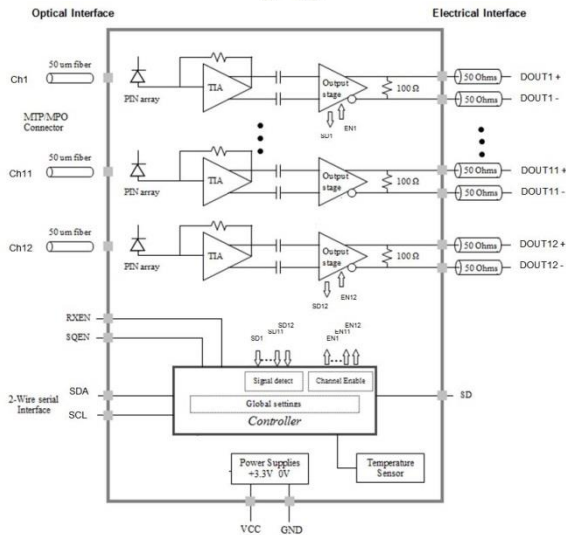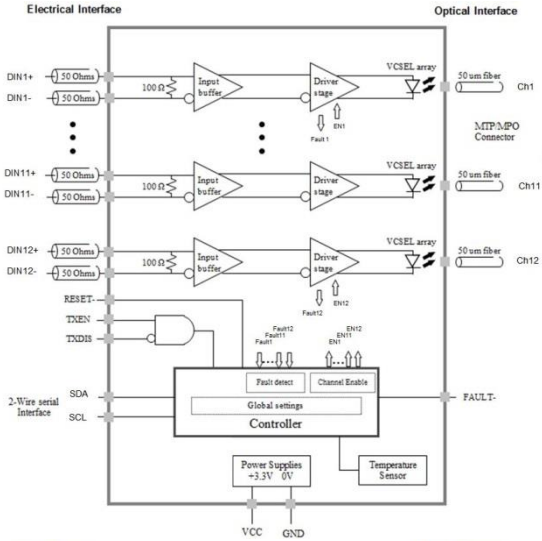

Functional Diagrams of PPOD TX / RX modules

## Optical Interface Lanes

The figure and table below show the orientation of the multimode fiber facets of the optical connector.

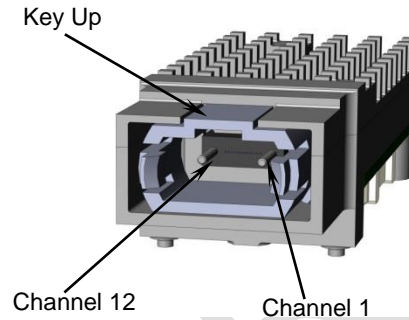

## Ordering Information

Description	
Transmitter, Heat sink, <b>RoHS</b> , 5 Gbps per channel Commercial Temp. range 0 to +80 °C (Tcase)	
Receiver, Heat sink, <b>RoHS</b> , 5 Gbps per channel Commercial Temp. range 0 to +80 °C (Tcase)	

For Part Number and more information or other packaging options contact sales at

**1-514-842-5179 or 1-408-715-1781** or  
[sales@reflexphotonics.com](mailto:sales@reflexphotonics.com)