
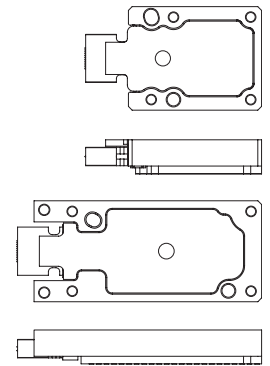


REFLEXPHOTONICS®

The most rugged high-performance embedded parallel optics.

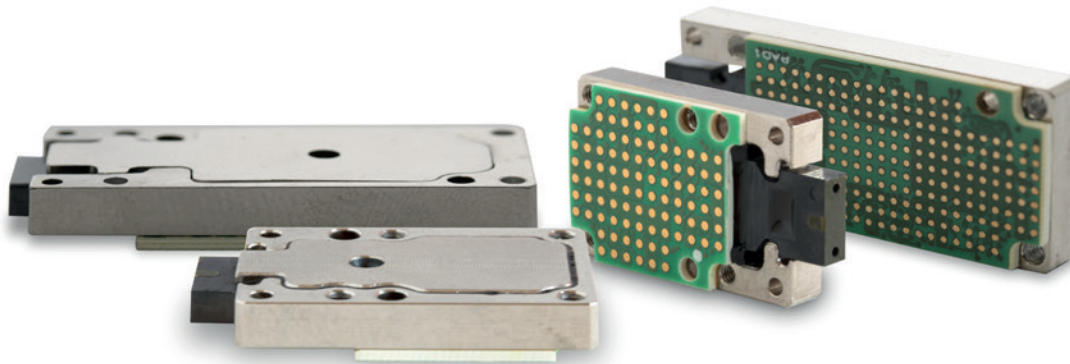

Real size for *LightABLE* LGA 50G and 150G (top) and *LightABLE* LGA 300G.

LightABLE LGA 50G, 150G, and 300G

Key advantages

- **Small:** Less than 6 mm high (module and interposer)
- **Rugged:** MIL-STD 883 shock and vibration qualified
- **Sealed:** Moisture and thermal shock resistant
- **Storage temperature:** -57°C to 125°C
- **Performance:** 12.5 Gbps/lane from -40°C to 100°C
- **BER:** As low as 10^{-15}
- **Sensitivity:** -12 dBm and -9 dBm versions available
- **Proven:** Thousands used in aerospace and defense applications
- **Low power consumption:** 100 mW/lane

Configurations

- 4TRX (50G) **NEW!**
- 12TX or 12RX (150G) **NEW!**
- 12TRX (300G) **NEW!**
- 24TX or 24RX (300G), in development.

Applications

- All digital AESA radars.
- High I/O density, high BW communication links.
- ISR embedded systems.


LightABLE LGA product summary

The low profile screw-in module (4.5 mm) mounts to the board via an LGA connector. It is offered as a (4+4)-lane transceiver, a 12-lane transmitter, or a 12-lane receiver, and a (12+12)-lane transceiver. All modules operate at 12.5 Gbps per lane from -40°C to 100°C at ultra-low bit error rates of 10^{-15} . The optical module includes equalizers and pre-emphasis to compensate long traces; these features can be turned off for short traces (less than 10 cm) to reduce power consumption.


THE *Light* on Board® Company

50G, 150G, and 300G *Light*ABLE LGA features


- Multimode 850 nm wavelength laser
- Over 100 m reach on OM3 ribbon fiber
- Standard MT parallel fiber connector
- RoHS
- Equalizer, pre-emphasis, adjustable output
- Monitoring: LOS, RSSI, temperature etc.
- Integrated microcontroller
- Available in industrial (−40°C to 100°C) grade temperature range

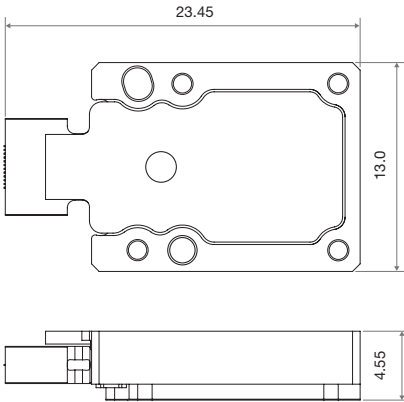


Drawing of *Light*ABLE LGA 50G and 150G

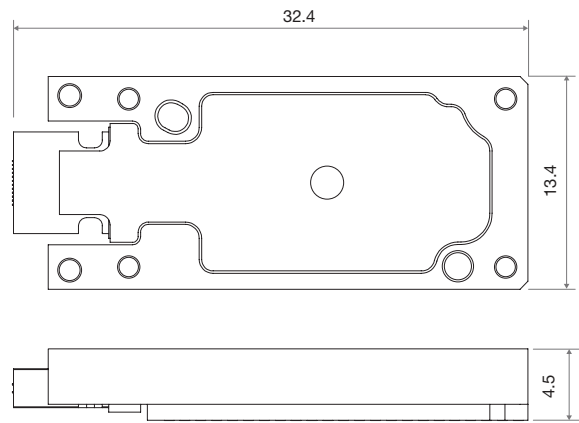


Drawing of *Light*ABLE LGA 300G

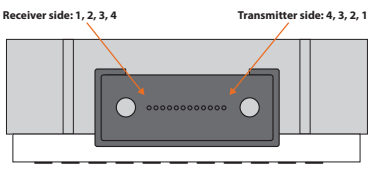

Fiber assignment of *Light*ABLE LGA 50

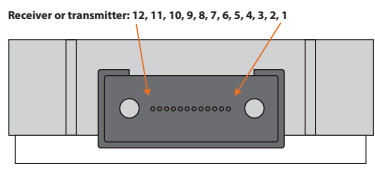

Fiber assignment of *Light*ABLE LGA 150G

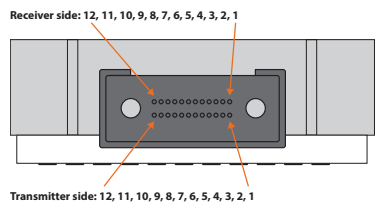

Fiber assignment of *Light*ABLE LGA 300G

*Light*ABLE LGA ordering information

Part Number	Product Description	Lanes	Bandwidth (Gbps/lane)	Sensitivity (dBm)	Mounting	Operating Temperature* (°C)
LMX04P418532101	LGA 4TRX transmit/receive	4+4	12.5	−9	LGA	−40 to 100
LMX04P418532301	LGA 4TRX transmit/receive	4+4	12.5	−12	LGA	−40 to 100
LMT12P418533001	LGA 12TX transmitter	12	12.5	n.a.	LGA	−40 to 100
LMR12P418530101	LGA 12RX receiver	12	12.5	−9	LGA	−40 to 100
LMR12P418530301	LGA 12TRX receiver	12	12.5	−12	LGA	−40 to 100
LMX12P418532101	LGA 12TRX transmit/receive	12+12	12.5	−9	LGA	−40 to 100
LMX12P418532301	LGA 4TRX transmit/receive	12+12	12.5	−12	LGA	−40 to 100

*Industrial part qualified between −40°C and 85°C at 10.3125 Gbps. Call for module in other temperature ranges or for cables.

THE *Light* on Board® Company

www.reflexphotonics.com

Reflex Photonics Inc.
16771, Chemin Ste-Marie
Kirkland, QC
H9H 5H3, Canada

For information on Reflex Photonics products, contact:

sales@reflexphotonics.com
+1.514.842.5179 (Montreal)
+1.408.715.1781 (USA)



Reflex Photonics is certified to ISO 9001

*All specifications are subject to change without notice. All brands are trademarks or registered trademarks of their respective owners and third party entities. Copyright © 2018 by Reflex Photonics. LightABLE_LGA_EN_201806