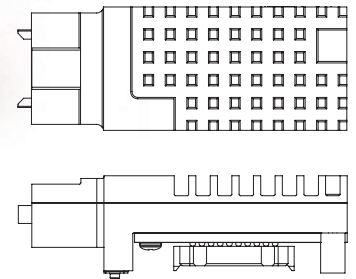
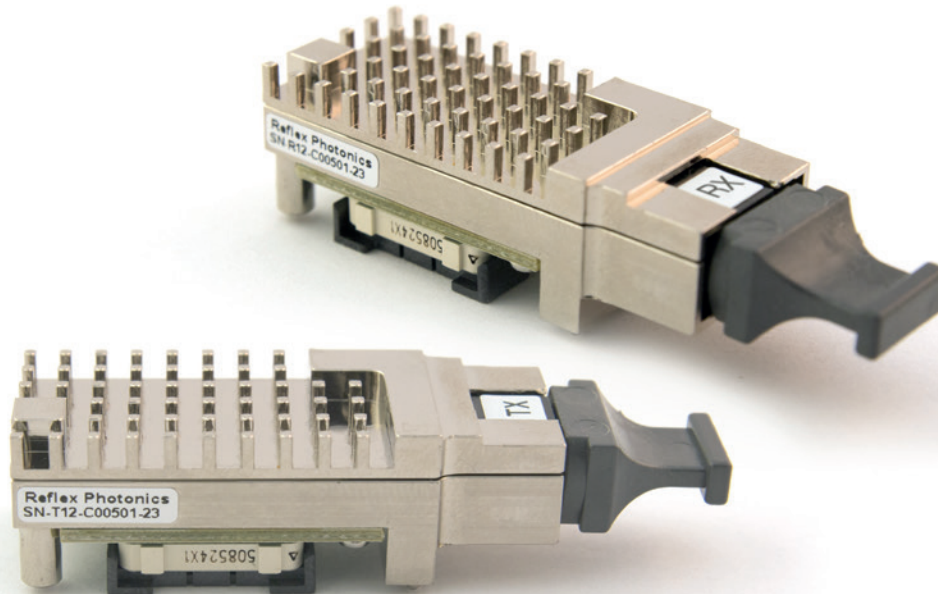


REFLEXPHOTONICS®

The most rugged high-performance embedded parallel optics.



Real size of SNAP12 module.

SNAP12 40G, 75G, and 120G

Key advantages

- **Rugged:** MIL-STD 883 shock and vibration qualified
- **Performance:** Up to 120 Gbps per module
- **Commercial operating temperature:** 0°C to 70°C
- **Proven:** thousands used in Aerospace & Defense and industrial applications
- **Reliable:** rugged construction to provide long life and consistent service
- **Easy to use:** Plug & Play - Standard MPO/MTP optical interconnect
- **Interoperable:** SNAP12 MSA compliant

Configurations

- 12-lane transmitter
- 12-lane receiver

Applications

- Advanced manufacturing
- Industrial automation and machine vision
- In-flight entertainment systems and connectivity (IFEC)
- High performance computer interconnects
- Aerospace & Defense
- Medical equipment

SNAP12 product summary

SNAP12 is a 12 lane pluggable parallel optical transmitter or receiver module with a standard chassis mountable MPO interface. It is a self-contained, electrical to optical converter, which requires no internal fiber management or handling. All modules include Reflex Photonics' state of the art *LightABLE™* optical packaging technology. The SNAP12 high speed rugged modules are used extensively in avionics for IFEC (in-flight entertainment and connectivity) applications, high performance computers, and industrial and medical equipment.

THE *Light* on Board® Company

SNAP12



Features


- 12 independent parallel optical lanes
- Data rate of up to 10.3125 Gbps per lane
- Commercial operating temperatures (0°C to 70°C)
- Standard MPO/MTP interconnect
- Single 3.3 V power supply
- OM3 and OM4 multimode fibers supported
- Data protocol agnostic

Application example

The use of the SNAP12 in the audio video distribution systems (AVDS) for in-flight entertainment and connectivity applications brings numerous advantages such as:

- Ability to distribute uncompressed video - the highest quality distribution possible
- Reduced aircraft wiring
- Reduced system weight
- Fault tolerance
- EMI/EMC and lightning tolerance over copper interconnects

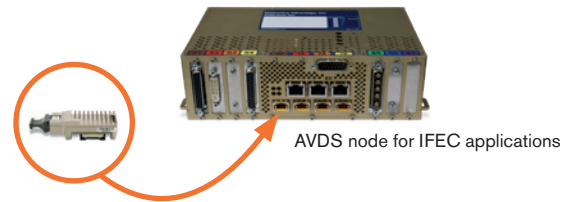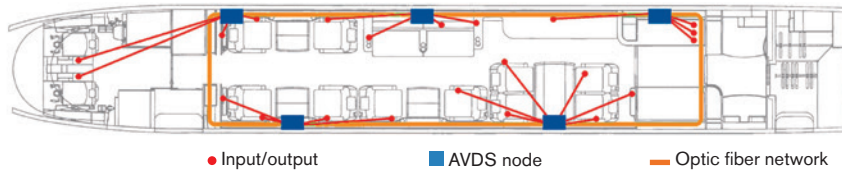

 Illustration courtesy of Innovative Advantage

SNAP12 ordering information

Part Number	Product Description	Bandwidth (Gbps/lane)	Operating Temperature (°C)
SN-T12-C01801-23	12-lane transmitter, RoHS	10.3125	0 to 70
SN-R12-C01801-23	12-lane receiver, RoHS	10.3125	0 to 70
SN-T12-C01001-23	12-lane transmitter, RoHS	6.25	0 to 70
SN-R12-C01001-23	12-lane receiver, RoHS	6.25	0 to 70
SN-T12-C00501-23*	12-lane transmitter, RoHS	3.125	0 to 70
SN-R12-C00501-23*	12-lane receiver, RoHS	3.125	0 to 70

*: Fully MSA compliant

THE *Light* on Board® Company

www.reflexphotonics.com

Reflex Photonics Inc.

16771, Chemin Ste-Marie
Kirkland, QC
H9H 5H3, Canada

Reflex Photonics is certified to ISO 9001

For information on Reflex Photonics products, contact:

sales@reflexphotonics.com
+1.514.842.5179 (Montreal)
+1.408.715.1781 (USA)

